


4455

22" Planer



EASY ACCESS TO CUTTERHEAD
keeps maintenance time to a minimum.

POWERFUL MOTOR
& 2-speed oil bath gear
box is easily accessible.

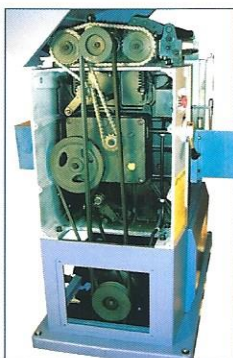

GENUINE BYRD™ TOOL
cutterhead also available.

Model No.	4455
Stock No. (7.5HP, 1Ph, Straight)	4455.001
Stock No. (10HP, 3Ph, Straight)	4455.002 (CSA)
Stock No. (7.5HP, 1Ph, Byrd)	4455.103.B
Stock No. (10HP, 3Ph, Byrd)	4455.104.B (CSA)
Maximum Stock Width	22"
Maximum Stock Thickness	9"
Minimum Stock Thickness	1/8" "
Minimum Stock Length	10"
Dust Port Diameter	5"
Minimum CFM Required	900 CFM
Infeed Roller Diameter	3"
Outfeed Roller Diameter	3-5/16"
Feed Speeds	20 and 30 FPM
Bed Rollers	2, Adjustable
Table Size	23-3/4" x 32-1/4"
Footprint	44"L x 22"W
Overall Dimensions	45"W x 32"D x 50"H
Cutterhead Diameter	3"
Number of Knives (straight)	4
Number of Knives (Byrd)	110
Cutterhead Speed	5,000 RPM
Table Support	2-Column
Motor (1Ph, 38 Amp)	7.5HP, 220V Only
Motor (3Ph, 26/13 Amp)	10HP, 240V/440V*, Prewired 220V
Net Weight	1,340 lbs.

- Available with two styles of a cutter head, straight, or authentic BYRD.
- BYRD Shelix carbide inserts are indexed for quick changing.
- Massive cast iron construction throughout.
- Polished built-in table roller assists movement of rough stock.
- Segmented infeed roller and sectional chip breaker easily handle rough stock.
- 2-speed gear box provides the perfect feed rate.
- Magnetic controls with emergency off switch for safer operation.
- Digital readout allows precise thickness settings.
- Hinged access to cutter head and feed rollers for quick set-up.
- Easy access to motor, drive train, and gearbox assist in maintenance and adjustment.
- 5" dust chute easily handles chip removal.
- 3 V-belt drive smoothly transfers power to drive train and cutter head.
- Powerful TEFC motor available in single or three-phase.

Optional Accessories:

A-Byrd Inserts	Box of 10 Byrd Inserts
4455.A001	Set of 4 Straight Knives

*Optional 440/460 volt available special order only. Additional cost/parts may apply.