


A B C D E F G H

NOTES:

1. MINIMUM 6" THICK REINFORCED SINGLE CONCRETE (3000 PSI STRENGTH) SLAB. RECOMMENDED FOR OPTIMUM PERFORMANCE.
2. SAFETY RAILINGS REMOVED FOR SHIPPING.
3. AIR REQUIREMENTS:
95-100 PSI
1/2" NPT MACHINE AIR CONNECTION
20 SCFM
4. ELECTRICAL REQUIREMENTS:

AMPERAGE: SEE ELEC. REQUIREMENTS SHEET IN NEW OWNERS BOOK
MACHINE MUST BE GROUNDED IN ACCORDANCE WITH NEC
5. CRITICAL SHIPPING DIMENSIONS:
GANTRY: 120"
BASE: 250"
HEIGHT: 85"
6. APPROX. WEIGHT:
10,500 LB.
7. DUST COLLECTION REQUIREMENTS:
1 HEAD 900 CFM

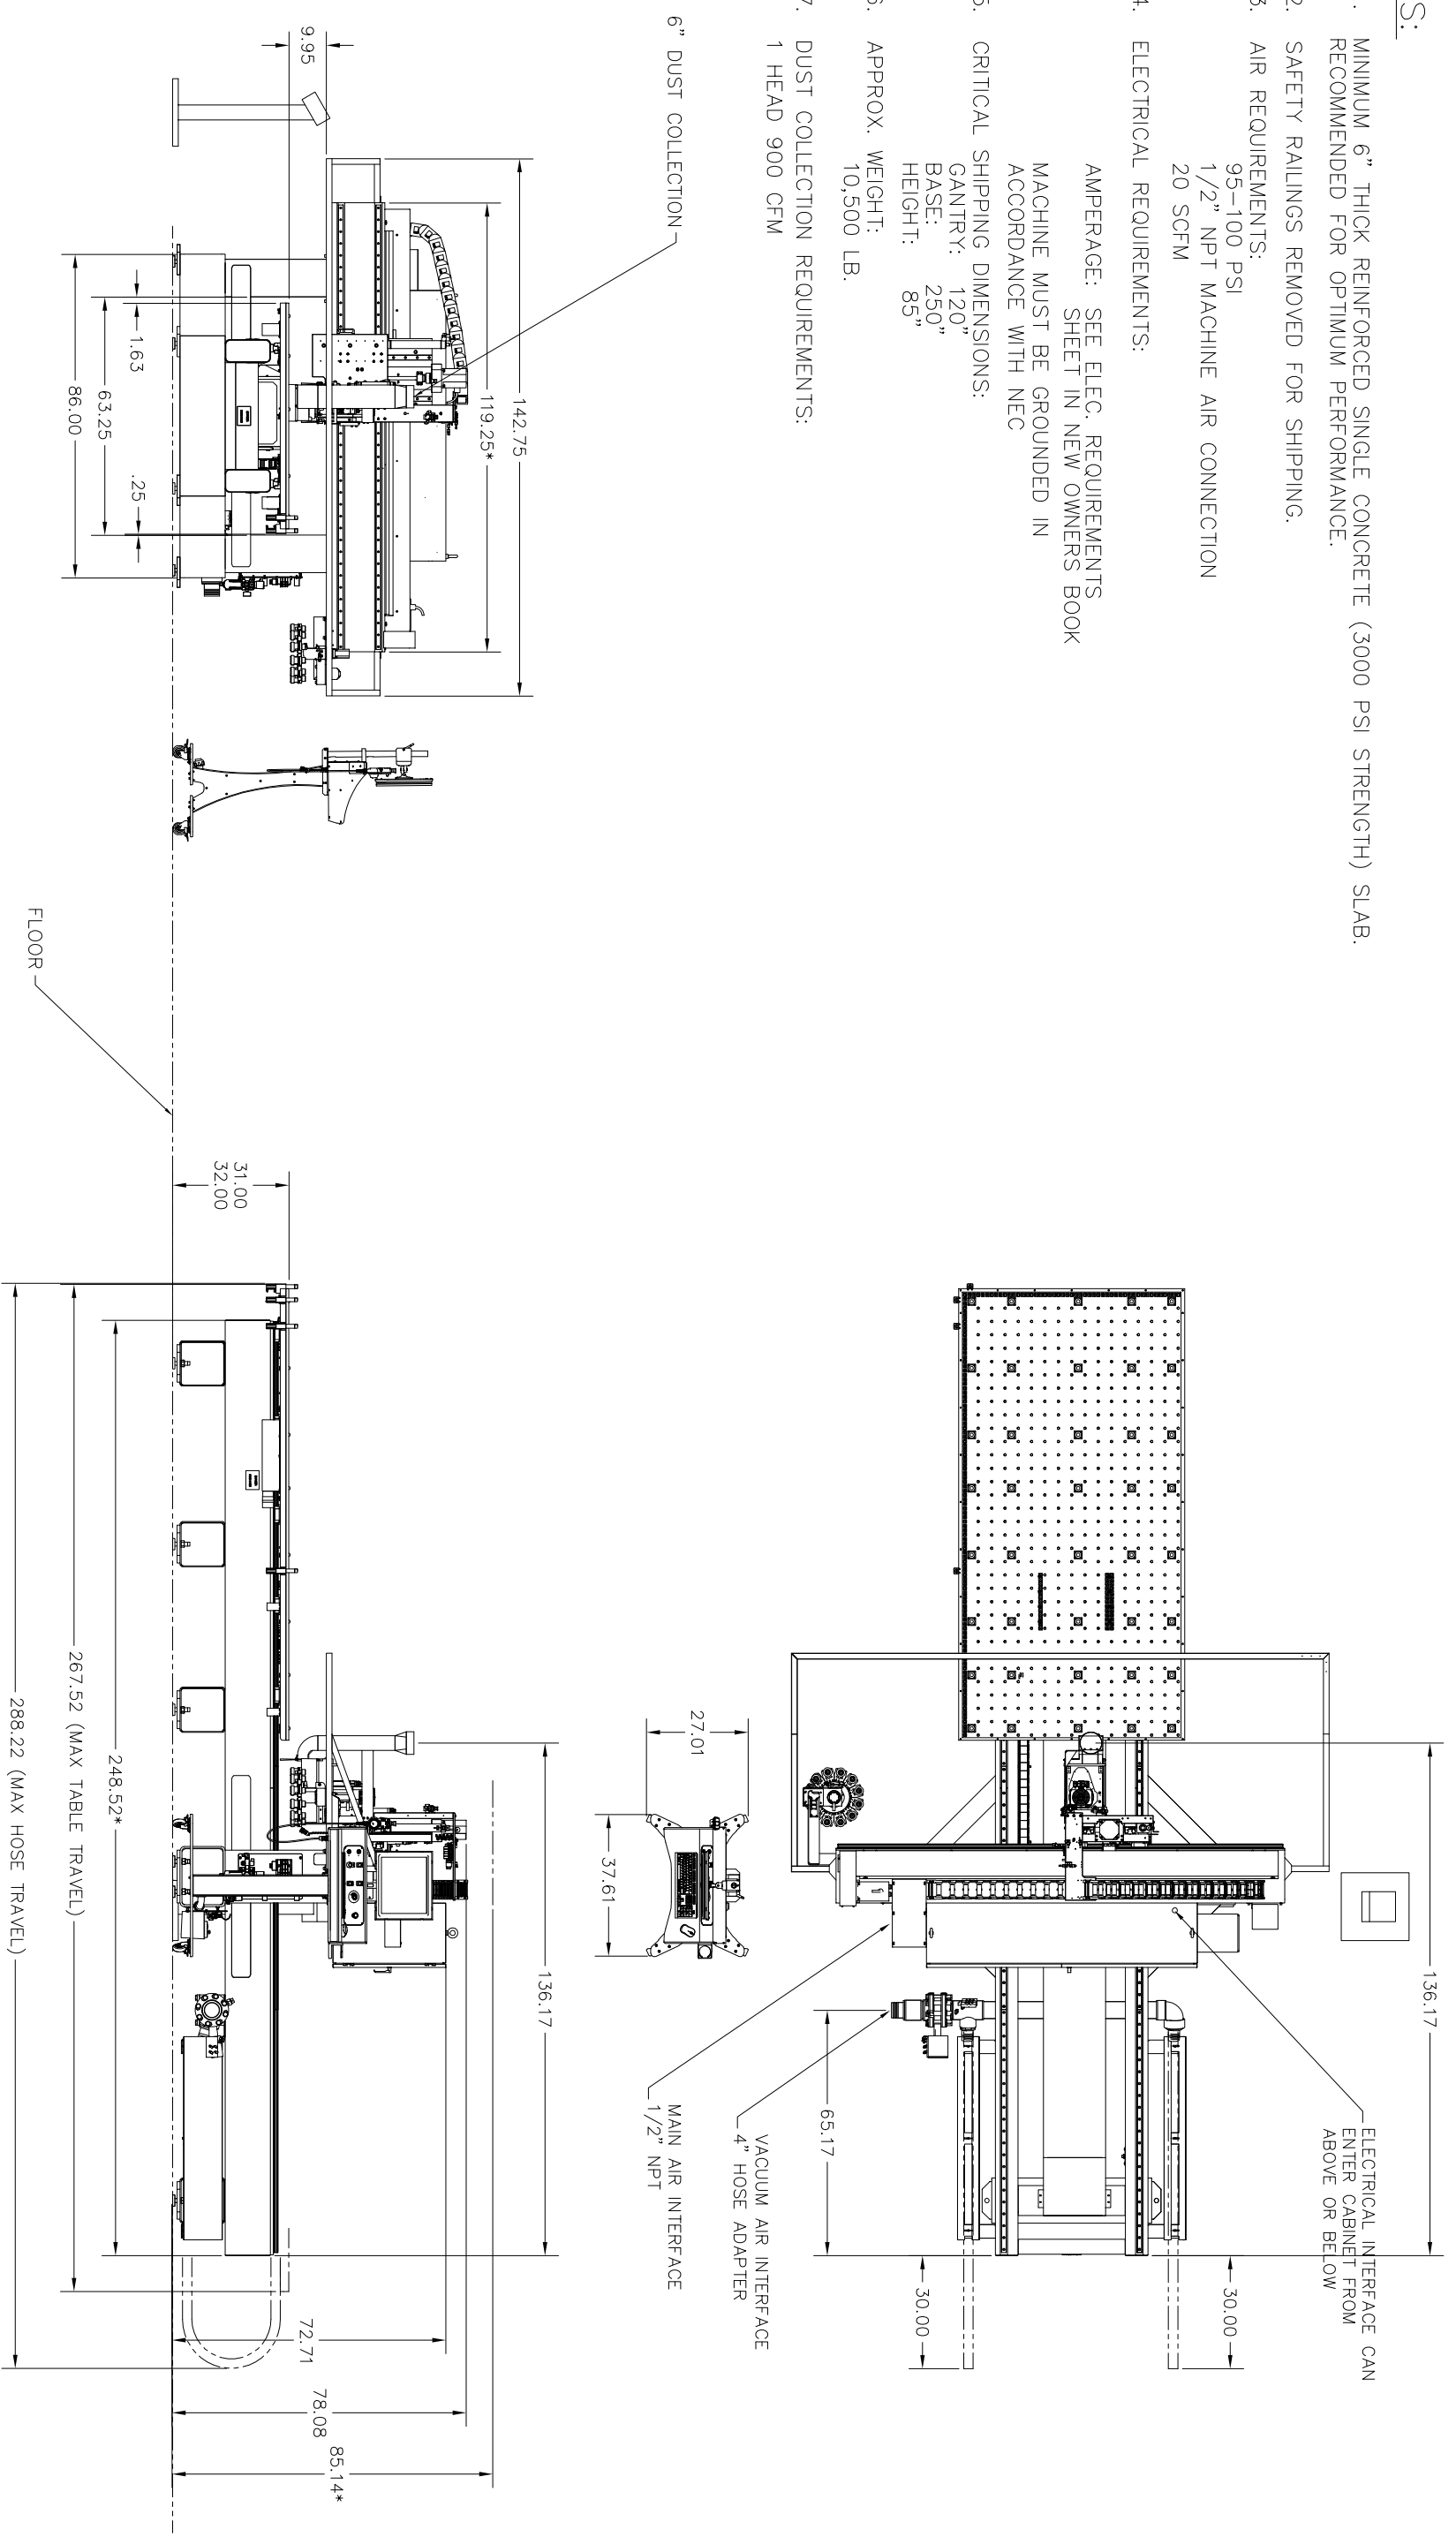

KOMO MACHINE, INC.
 (732) 719-6222
 1 KOMO DRIVE
 LAKEWOOD, NJ 08701

XTREME XL 510

TITLE	SIZE	DWG. NO.	DATE	SHEET
	D	EXT 510	03/08/2019	1 OF 1
				REV.

SCALE: 1:25