


Magnetic Push



Application of the release device to be recessed

Drill a hole $\varnothing 10$ mm and min. 40 mm depth in the top, the side or the base panel of the cabinet.
Insert the release device into the hole.

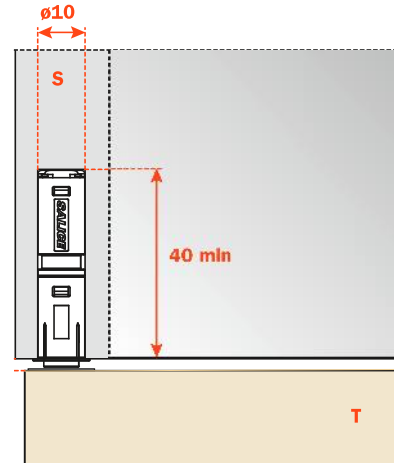

1 - Retaining catch with adhesive strip


Apply the retaining catch to the magnetic release device.
Remove the protective strip from the adhesive.
Close the door.
In this way the retaining catch is positioned on the door.
Reopen the door and apply a firm pressure to the retaining catch
to ensure a correct installation.

ATTENTION:

For a correct application and to ensure optimal endurance,
we suggest these guidelines are followed:

- 1** - clean and degrease the door surface where the retaining catch is to be installed;
- 2** - remove the protective strip from the adhesive;
- 3** - place the retaining catch in position, in a place that is at room temperature $\geq 10^{\circ}$ and apply a firm pressure for 10-15 seconds.

After few seconds from the installation the retaining catch is suitable for the use. After 24h the max. hold is attained.

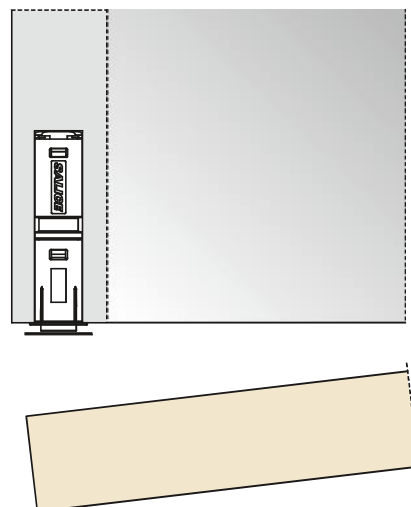

2 - Retaining catch to be inserted

Apply the retaining catch to the magnetic release device.
Close the door.
The point of the retaining catch will show where to insert it.
Reopen the door and press the retaining catch.

