


# CONCEALED HINGE (SURFACE MOUNT)



T-90-200

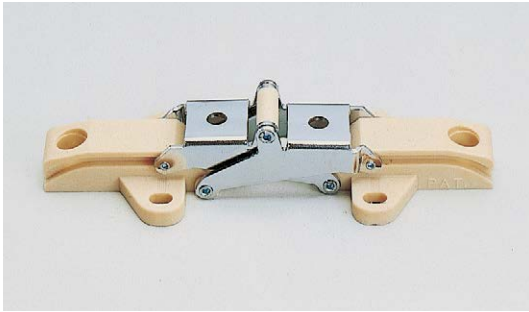

**Features**


- Opening angle 90°.
- Can be used both for inset and overlay doors.
- Without catch.

**Recommended Screws**

Pan head tapping screw size 4

Part Name	Material	Finish/Colour
Body	Polyamide (PA)	Ivory
Arm	Steel	Chrome

Item Code	Item Name	Type	Overlay	Door Thickness	Opening Angle	Weight	Carton
170-090-090	T-90-200	Without Catch	15 - 18	15 - 18	90°	42 g	200 pcs

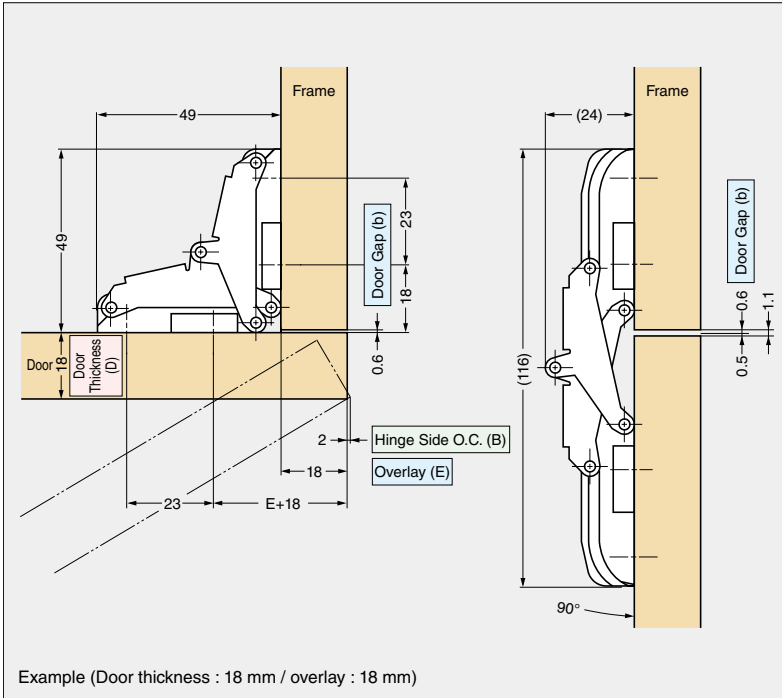

**Hinge Side O.C. (B)**

Door Thickness (D)	Overlay (E)			
	15	16	17	18
15	1.1	0.5	0	0
16	2.0	1.4	0.8	0.2
17	2.9	2.3	1.7	1.1
18	3.8	3.2	2.6	2.0

Hinge Side O.C. (B)

**Handle Side O.C. (A)**

Door Thickness (D)	Door Width		
	300	400	500
15	0.5	0.4	0.3
16	0.5	0.4	0.4
17	0.5	0.4	0.4
18	0.5	0.4	0.4

Handle Side O.C. (A)

**Overlay (E) and Door Gap (b)**

Overlay (E)	15	16	17	18
Door Gap (b)	0.2	0.3	0.5	0.6

